


Maintainance Free Lead Acid Battery

Appliactions

- | | |
|------------------------|--------------------|
| Ups | Telecom Systems |
| Solar Systems | Cable TV |
| Electric Wheelchair | Power Station |
| Marine Equipment | Military Equipment |
| Golf Car | Electric Fork |
| Emergency Power System | Railway System |

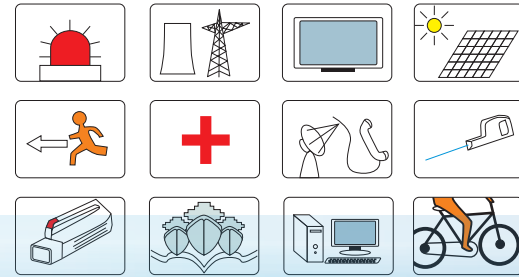

container and cover are available both in V0 class

flame retardant ABS or HBO ABS plastics, With more than 15 years of production experience, VISION FM series of VRLA batteries are recognized as the most reliable and high quality battery system in the industry.

Product standards

You can expect our batteries meet with the standards JIS, DIN, IEC & BS6290-4, We have obtained ISO9001 & ISO14001 certification, We have obtained UL approval (MH25860) for all types of batteries, we have obtained CE approval for all type of batteries, All these render our batteries to be compatible with requirements of word-level equipment.

General Features

High Reliability and Good Quality. Deep Discharge Recovery High Power Density Long Service Life, in Float or cyclic. International Standard, JIS and DIN.

FM Series Index

Battery Type	Nominal voltage (V)	Rate capacity (AH)	Capacity rate/hour (AH)					Size(±1mm)				Terminal type
			1.75V	1.75V	1.75V	1.70V	1.60V	L	W	H	TH	
			20HR	10HR	5HR	1HR	15MR	L	W	H	TH	
FM40-12	12	40.0	40	38	33.6	30	22.4	197	165	170	170	B4/T2
FM50-12	12	50.0	53	50	49.5	39.8	29.7	257	132	200	200	T2
FM55-12	12	55.0	59	55	49.6	44.3	33	239	167	205	235	B5/T2
FM65-12	12	65.0	70	65	58.8	52.5	39.2	350	167	179	183	B4/T2
FM75-12	12	75.0	80	75	67.2	60	44.8	350	175	179	183	B5/T2
FM90-12	12	90.0	98	90	82.3	73.5	54.9	306	168	210	235	B5/T2
FM100-12	12	100.0	109	100	91.6	81.8	61	330	171	214	220	B3/T2
FM120-12	12	120.0	129	120	108.4	96.8	72.2	410	175	227	227	B3/T2
FM150-12	12	150.0	162	150	136.1	121.5	90.7	485	172	240	240	B3/T3
FM200-12	12	200.0	220	205	184.8	165	123.2	522	238	218	243	B3/T4
FM100-6	6	100.0	108	100	91.6	81.8	61	195	170	206	212	B3/T2
FM120-6	6	120.0	129	120	108.4	96.8	72.2	280	128	203	203	B3/T2
FM150-6	6	150.0	162	150	136.1	121.5	90.7	260	180	247	253	B3/T3
FM200-6	6	200.0	216	200	184.8	165	123.2	322	178	228	234	B3/T4

